


Date: Page:

Pump Data	
Brand :	JMS
Model :	JUMPER 70 M
Flow Rate:	44 GPM
Head Rate: 32 FEET	
Head Max: 41 FEET	Flow Min : 5 GPM
Flow Max: 82 GPM	Head Min: 6.6 FEET
RPM :	3450 rpm
Normal Power P1 :	2 HP
Fluid:	Water
Fluid Temperature:	at about 25 °C.
Density:	water 1.0 kg/Dm ³
Fluid Viscosity:	8.90 × 10 ⁻⁴ Pa-s
With Float switch	NONE
kind of Workiny:	Submersible
Delivery size	1" 1/2 NPT
Suction size	With Strainer
Made in :	ITALY

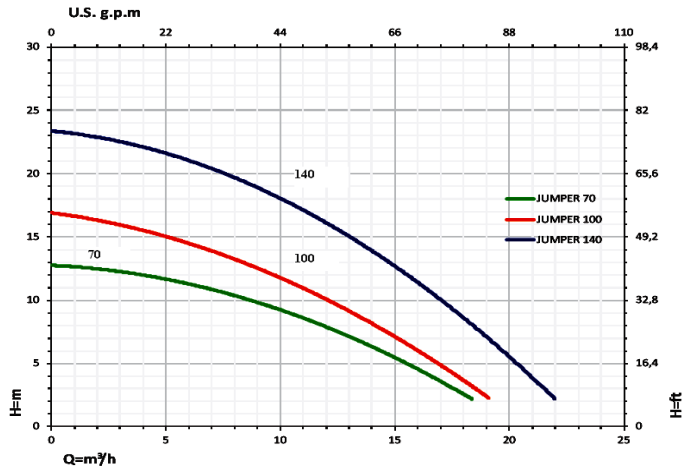


Motor Data	
Power P2:	
Power P1:	1.5 KW
Phase (PH):	1
Rate Voltage :	115 V
Capacitor Need :	25 μF
Ferequency :	60 Hz
Rated Speed (rpm):	3450 rpm
Max. I (A):	13 A
Cos φ :	0.95
Degree of Protection (IP):	IP 68
Safety Protection Included:	F
length of Cable :	10 M
Kind of Plug :	NONE
Ambient Temp :	40°C = 104°F

Other Pump Data	
Impeller Size (mm) :	*
Pressuer Rating :	PN 16
Min. Fluid Temp :	10°C = 50°F
Max. Fluid Temp :	35°C = 95°F
Ambient Temp :	40°C = 104°F
Humidity % :	100%

Special Specification	
Installation status :	Vertical
Variable frequency :	NONE
Solid Passage	8 mm

Materials	
Pump Body :	CAST IRON
Support:	Stainless steel
Impeller	Stainless steel
Mechanical Seal:	Silicon Carbide / Ceramic
Rubber	NBR
Pump Shaft:	Stainless steel
Strainer	Stainless steel
outer cover:	CAST IRON
Motor:	Stainless steel

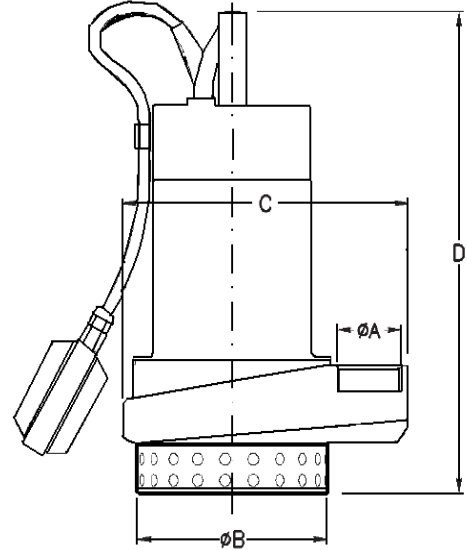

Shaft Seal	
Type:	*
Stationary Part	Silicon Carbide
Rotating Part	Silicon Carbide
Elastomer	NBR
Pump and Motor specification optional	
With Booster System	None
With Complack	None
Special Material	None
Specail Voltage	None
Protection system required	
External Flout switch	YES
Minimum Starter	Starter SWT

Weight : 16 Kg
Standard Approve
CE

Applicant:	
Cellar Garage And Basement	Pump Out
Swimming Pools All Sorts of	Vats Tanks
And Reservoir Pump Out	Pit and Catch
Tank Water Pump out	Rain Seepage Sump
Garden and Vegetable Garden	Irrigation

Dimention in	
	mm
A	1"1/2 NPT
B	190
C	213.5
D	300